


Panasonic[®]

Operating Instructions

Interface Board for 12G-SDI **Commercial Use**

Model No. **ET-MDN12G10**



ENGLISH

FRANÇAIS

Thank you for purchasing this Panasonic product.

- Before using this product, please read these “Operating Instructions” and the “Operating Instructions” of the projector carefully and save the manuals for future use.
- Before using this product, be sure to read “Read this first!” (➔ page 3).

4K
PROFESSIONAL

Contents

Read this first!	3
Precautions for use	4
Supported projector	4
About the handling of the product	4
Disposal	4
Accessories	4
Part names and functions	5
Installing the Interface Board	5
Before installing or removing the Interface Board	5
How to install the Interface Board	6
How to remove the Interface Board	7
Specifications	8

Read this first!

WARNING:

Do not spill water on this product or allow this product to get wet.

Doing so may cause fire, electric shock, or malfunction due to short circuit or overheating.

- Do not place a container with liquid close to this product.
- Consult your dealer when liquid such as water is spilled on this product.

Do not place the supplied screws in a location that a child can reach.

Accidentally swallowing them can cause a physical harm.

- Seek a medical advice immediately if a child might have swallowed a screw.

Do not disassemble or modify.

Doing so may cause electric shock or fire. It may also cause a malfunction.

CAUTION:

Do not place this product in a location with excessive humidity or dust, or in a location exposed to oil smoke or steam.

Doing so may cause fire or electric shock.

Do not place this product in extremely hot location.

Doing so may deteriorate the part, or may cause fire.

- Do not install or store in a location with direct sunlight or close to the heating device, etc.

Turn off the power and disconnect the power plug from the outlet when installing or removing this product to/from the projector.

Failure to do so may cause electric shock.

Precautions for use

This product is a 12G-SDI signal compatible interface board for use installed in a Panasonic Connect Co., Ltd. projector.

Supported projector

PT-RQ32K series, PT-RQ13K series, PT-RQ22K series
(As of March 2019)

Note

- Products other than the above may also be supported. Check the Operating Instructions of your projector.
- If the main version of the firmware of the PT-RQ32K or PT-RQ13K is less than 3.00, this interface board cannot be used. Update the firmware to the latest version before use. Check the update procedure by accessing the page containing the latest information on the firmware at the website (<https://panasonic.net/cns/projector/pass/>).

About the handling of the product

■ Do not touch the connector section of the Interface Board directly with your hands.

The component may be damaged by the static electricity. Handle this product after removing the static in your body by touching the surrounding metal, etc.

Disposal

To dispose of the product, ask your local authorities or dealer for correct methods of disposal.

Accessories

Make sure that the following accessories are provided with your product. Numbers enclosed in < > show the number of accessories.

Screw <4>
(XSB3+8FN)




Attention

- Appropriately discard the packaging material after unpacking the product.
- For missing accessories, consult your dealer.
- Store small parts in an appropriate manner, and keep them away from small children.

Note

- The supplied screws are spare. Use them when a screw to fix the slot cover of the projector is lost.
- The model numbers of accessories are subject to change without prior notice.

Part names and functions

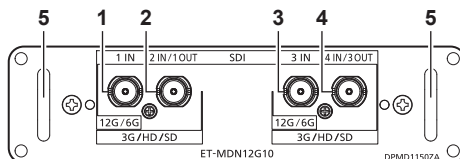

1 <SDI 1 IN> terminal

This is a terminal to input SDI signals (SD-SDI / HD-SDI / 3G-SDI / 6G-SDI / 12G-SDI).

2 <SDI 2 IN/1 OUT> terminal

This is a terminal to input SDI signals (SD-SDI / HD-SDI / 3G-SDI). It is also an active through terminal to output the SDI signals (SD-SDI / HD-SDI / 3G-SDI / 6G-SDI / 12G-SDI) input to the <SDI 1 IN> terminal.

3 <SDI 3 IN> terminal

This is a terminal to input SDI signals (SD-SDI / HD-SDI / 3G-SDI / 6G-SDI / 12G-SDI).

4 <SDI 4 IN/3 OUT> terminal

This is a terminal to input SDI signals (SD-SDI / HD-SDI / 3G-SDI). It is also an active through terminal to output the SDI signals (SD-SDI / HD-SDI / 3G-SDI / 6G-SDI / 12G-SDI) input to the <SDI 3 IN> terminal.

5 Handle

Note

- The <SDI 2 IN/1 OUT> terminal and <SDI 4 IN/3 OUT> terminal do not support the input of 6G-SDI signals and 12G-SDI signals.
- To use the <SDI 2 IN/1 OUT> terminal and <SDI 4 IN/3 OUT> terminal as output terminals, you need to change the settings of the projector. Check the Operating Instructions of your projector.

Installing the Interface Board

It is recommended to ask a qualified technician to install or remove the Interface Board to a projector. A malfunction may occur due to static electricity. Consult your dealer.

Before installing or removing the Interface Board

- Always turn off the power of the projector before installing or removing the Interface Board.
 - Make sure to follow the procedure described in the Operating Instructions of your projector when turning off the power.

Installing the Interface Board

- Do not touch the connector section of the Interface Board directly with your hands.
 - The component may be damaged by the static electricity.
- Remove the static charge from your body by touching the surrounding metal, etc., in advance to prevent the static electricity damage.
- Take care not to get injured when installing or removing the Interface Board.
 - Hands may be injured by the opening of the blank slot of the projector or the edge of the bracket of the Interface Board.
- When installing the Interface Board to the slot, insert it into the connector straight and slowly.
 - It may not operate or cause malfunction if it is not correctly installed.
- Install and use this interface board in one of the <SLOT 1> and <SLOT 2> slots. If this interface board is installed both in <SLOT 1> and in <SLOT 2>, only the one installed in <SLOT 1> can be used.

How to install the Interface Board




Fig. 1




Fig. 2




Fig. 3

1) Remove the slot cover. (Fig. 1)

- Remove the four screws fixing the slot cover of the projector by rotating counterclockwise with a Phillips screwdriver. The removed screws are used to fix the Interface Board.
- When removing the fourth screw, hold the slot cover with your hand so it will not fall.
- To replace from other Interface Board, remove the Interface Board following the procedure in “How to remove the Interface Board” (➡ page 7).

2) Install the Interface Board to the projector. (Fig. 2)

- Insert the guide groove of the Interface Board aligned to the salient of the slot. Insert the bracket firmly all the way in.

3) Fix the Interface Board. (Fig. 3)

- Tighten and fix with the four screws removed in Step 1).

Attention

- The removed slot cover is required when the unnecessary Interface Board is removed. Store it so it can be attached in the future.

How to remove the Interface Board




Fig. 1

1) Remove the Interface Board. (Fig. 1)

- Remove the four screws fixing the Interface Board by rotating counterclockwise with a Phillips screwdriver. The removed screws are used to fix the slot cover.
- Hold the handle of the Interface Board and remove it slowly.

2) Attach the slot cover.

- Attach the stored slot cover to the blank slot, and tighten and fix with the four screws removed in Step 1).

Attention

- Always attach the slot cover on the blank slot.
- Store the removed Interface Board inside an antistatic bag.

Specifications

Compatible slot		SLOT NX specification
Connection terminals / supported signals	Inputs	BNC 4 lines (<SDI 1 IN> terminal, <SDI 2 IN/1 OUT> terminal, <SDI 3 IN> terminal, <SDI 4 IN/3 OUT> terminal) Single link SD-SDI signal, SMPTE ST 259 standard compliant Single link HD-SDI signal, SMPTE ST 292 standard compliant Single link 3G-SDI signal, SMPTE ST 424 and 425-2 standards compliant Single link 6G-SDI signal, SMPTE ST 2081-1 and 2081-10 standards compliant Supported by <SDI 1 IN> terminal and <SDI 3 IN> terminal only Single link 12G-SDI signal, SMPTE ST 2082-1 and 2082-10 standards compliant Supported by <SDI 1 IN> terminal and <SDI 3 IN> terminal only Dual link HD-SDI signal, SMPTE ST 372 standard compliant <SDI 1 IN> terminal: Link A signal / <SDI 3 IN> terminal: Link B signal Dual link 3G-SDI signal, SMPTE ST 425-3 standard compliant <SDI 1 IN> terminal: Link 1 signal / <SDI 3 IN> terminal: Link 2 signal Dual link 6G-SDI signal, SMPTE ST 2081-11 standard compliant <SDI 1 IN> terminal: Link 1 signal / <SDI 3 IN> terminal: Link 2 signal Quad link HD-SDI signal <SDI 1 IN> terminal: Link 1 signal / <SDI 2 IN/1 OUT> terminal: Link 2 signal / <SDI 3 IN> terminal: Link 3 signal / <SDI 4 IN/3 OUT> terminal: Link 4 signal Quad link 3G-SDI signal, SMPTE ST 425-5 standard compliant <SDI 1 IN> terminal: Link 1 signal / <SDI 2 IN/1 OUT> terminal: Link 2 signal / <SDI 3 IN> terminal: Link 3 signal / <SDI 4 IN/3 OUT> terminal: Link 4 signal
		BNC 2 line (also functions as input terminal) (<SDI 2 IN/1 OUT> terminal, <SDI 4 IN/3 OUT> terminal) Performs active through output of the signals input to the <SDI 1 IN> terminal and <SDI 3 IN> terminal.
	Outputs	
Dimensions	Width	151 mm (5-15/16")
	Height	38.5 mm (1-17/32")
	Depth	142 mm (5-19/32")
Weight		400 g (14.1 ozs.)

Note

- “SLOT NX” is a name of the slot unique to Panasonic Connect Co., Ltd. supporting the signal input for the 4K image.
- The video signal that can actually display will vary depending on the projector that the Interface Board is installed. For details, refer to the Operating Instructions of your projector.
- When the projector is in the standby state, signals are not output from the <SDI 2 IN/1 OUT> terminal and <SDI 4 IN/3 OUT> terminal.
- To ensure images are transmitted correctly, use 5C-FB or higher (5C-FB, 7C-FB, etc.), Belden 1694A or higher, or Canare Electric L-5.5CUHD for the connection cable. Furthermore, the maximum lengths of cables that can be used are as follows. However, these maximum cable lengths are provided as a guide, and are not a guarantee of transmission distances.
 - SD-SDI signal, HD-SDI signal, and 3G-SDI signal: 150 m
 - 6G-SDI signal: 80 m (110 m if L-5.5CUHD is used.)
 - When 12G-SDI, differs depending on the setting of [Display Options] menu → [SLOT IN] → [SDI Mode] of the projector.
 - When [SDI Mode] is set to [Input], 50 m (100 m if L-5.5CUHD is used.)
 - When [SDI Mode] is set to [Output], 50 m (90 m if L-5.5CUHD is used.)
- When [Display Options] menu → [SLOT IN] → [SDI Mode] of the projector is set to [Output], attach a terminating resistor (75 Ω) to the terminal to which a device is not connected as an output destination.
- For the BNC connector of the connection cable, use one that supports the coaxial cable and types of signal to be used.

English

Manufactured by:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importer:

Panasonic Connect Europe GmbH

Authorized Representative in EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Germany

Importer for UK;

Panasonic Connect UK,
a branch of Panasonic Connect
Europe GmbH,
Maxis 2, Western Road, Bracknell,
Berkshire, RG12 1RT

UK
CA

Italiano

Fabbricato da:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Giappone

Importatore:

Panasonic Connect Europe GmbH

Rappresentante autorizzato nell'UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Amburgo, Germania

Français

Fabriqué par:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japon

Importateur :

Panasonic Connect Europe GmbH

Représentant autorisé dans l'UE :

Panasonic Testing Centre
Winsbergring 15, 22525 Hambourg, Allemagne

Български

Производител:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Япония

Вносител:

Panasonic Connect Europe GmbH

Упълномощен представител в ЕС:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Германия

Español

Fabricado por:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japón

Importador:

Panasonic Connect Europe GmbH

Representante Autorizado para la UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburgo, Alemania

Čeština

Vyrobil:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonsko

Dovozce:

Panasonic Connect Europe GmbH

Oprávněný zástupce v EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Německo

Deutsch

Hergestellt von:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importeur:

Panasonic Connect Europe GmbH

Vertretungsberechtigter in der EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Deutschland

Dansk

Fremstillet af:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importør:

Panasonic Connect Europe GmbH

Autoriseret repræsentant i EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Tyskland

Eesti

Tootja:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Jaapan

Maaletootja:

Panasonic Connect Europe GmbH

Volitatud esindaja ELis:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Saksamaa

Lietuvių

Gamintojas:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonija

Importuotojas:

Panasonic Connect Europe GmbH

Ilgaliotasis atstovas ES:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Vokietija

Ελληνικά

Κατασκευάστηκε από:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Ιαπωνία

Εισαγωγέας:

Panasonic Connect Europe GmbH

Εξουσιοδοτημένος αντιπρόσωπος στην ΕΕ:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Γερμανία

Magyar

Gyártotta:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japán

Importőr:

Panasonic Connect Europe GmbH

Hivatalos képviselő az EU-ban:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Németország

Hrvatski

Proizvodi:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Uvoznik:

Panasonic Connect Europe GmbH

Onlašteni zastupnik u EU-u:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Njemačka

Nederlands

Geproduceerd door:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importeur:

Panasonic Connect Europe GmbH

Bevoegde vertegenwoordiger in de EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Duitsland

Latviešu

Ražotājs:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japāna

Importētājs:

Panasonic Connect Europe GmbH

Oficiālais pārstāvis ES:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Vācija

Norsk

Produsert av:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importør:

Panasonic Connect Europe GmbH

Autorisert representant i EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Tyskland

Polski

Wyprodukowano przez:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonia

Importer:

Panasonic Connect Europe GmbH

Upoważniony przedstawiciel w UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Niemcy

Slovenščina

Proizvajala:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonska

Uvoznik:

Panasonic Connect Europe GmbH

Pooblaščen zastopnik v EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Nemčija

Português

Fabricado por:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japão

Importador:

Panasonic Connect Europe GmbH

Representante Autorizado na UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburgo, Alemanha

Türkçe

Tarafından Üretilmiştir:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonya

İthalatçı:

Panasonic Connect Europe GmbH

AB Yetkili Temsilcisi:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Almanya

Română

Fabricat de:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonia

Importator:

Panasonic Connect Europe GmbH

Reprezentant autorizat în UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Germania

Suomi

Valmistaja:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japani

Maahantuoja:

Panasonic Connect Europe GmbH

Valtuutettu edustaja EU:ssa:

Panasonic Testing Centre
Winsbergring 15, 22525 Hampuri, Saksa

Slovenčina

Výrobca:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonsko

Dovozca:

Panasonic Connect Europe GmbH

Autorizovaný zástupca v EÚ:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Nemecko

Svenska

Tillverkad av:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importör:

Panasonic Connect Europe GmbH

Auktoriserad representant i EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Tyskland

MEMO



Product Information (for Turkey only)



AEEE Yönetmeliğine Uygundur.
Eski Ekipman ve Bataryaların İşlenmesi.
Sadece geri dönüşüm sistemleri olan Avrupa Birliği ve
ülkeleri için geçerlidir.

Ürünler, ambalaj ve/veya ekli belgeler üzerindeki bu semboller kullanılmış elektrik ve elektronik ürünlerin genel ev atığı ile karıştırılmaması gerektiğini ifade eder.
Eski ürünlerin toplanması ve geri kazanılması için bu atıkları lütfen yasayla belirlenmiş olan uygun toplama merkezlerine teslim ediniz.

Bu atıkların doğru işlenmesiyle, değerli kaynakların korunmasına ve insan sağlığı ve çevreye olası negatif etkilerinin engellenmesine yardımcı olabilirsiniz.

Atıkların toplanması ve geri dönüşümü için detaylı bilgi için lütfen bağlı olduğunuz yerel yönetimlerle iletişime geçiniz.
Atıkların atılmasıyla ilgili yanlış uygulamalar yasayla belirlenmiş olan cezalara sebebiyet verebilir.

Panasonic Connect Co., Ltd.

Web Site : <https://panasonic.net/cns/projector/>

© Panasonic Connect Co., Ltd. 2022

Panasonic Connect North America

Two Riverfront Plaza, Newark, NJ 07102

TEL: (877) 803 - 8492

Panasonic Canada Inc.

5770 Ambler Drive, Mississauga, Ontario L4W 2T3

TEL: (905) 624 - 5010

T11217AM2042 -PS

Printed in China