

This module is to be mounted onto a PT-DZ570 series DLP™ projector when using the wireless function.

**Specifications**


Power supply:	Supplied from the projector.
Standard:	IEEE 802.11b/g/n
Modulation:	Direct sequence spread spectrum (DSSS) system, Orthogonal frequency division multiplex (OFDM) system
Transmission speed (standard)*1:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n: Up to 150 Mbps
Frequency range (channel):	2,412–2,472 MHz (1–13 ch)
Access method:	Infrastructure mode, ad-hoc mode*2
Security:	WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WEP (128 bit/64 bit)
Antenna:	Tx 1, Rx 1
Interface:	USB 2.0
Dimensions (W × H × D):	23 × 9 × 63 mm (29/32" × 11/32" × 2-15/32")
Weight:	Approx. 10 g*3 (0.4 ozs*3)
Operating environment: Temperature:	0°– 45°C (32°–113°F)
Humidity:	20%–80% (no condensation)

**Supplied accessory**

Wireless Manager ME 5.5 (CD-ROM)

- \*1 This is a theoretical speed. The actual transfer speed varies depending on the usage environment and connected devices.
- \*2 Not supported by IEEE 802.11n.
- \*3 Average value. May differ depending on models.
- \*4 Conforms to the environmental conditions of the mounted projector.

**Dimensions**

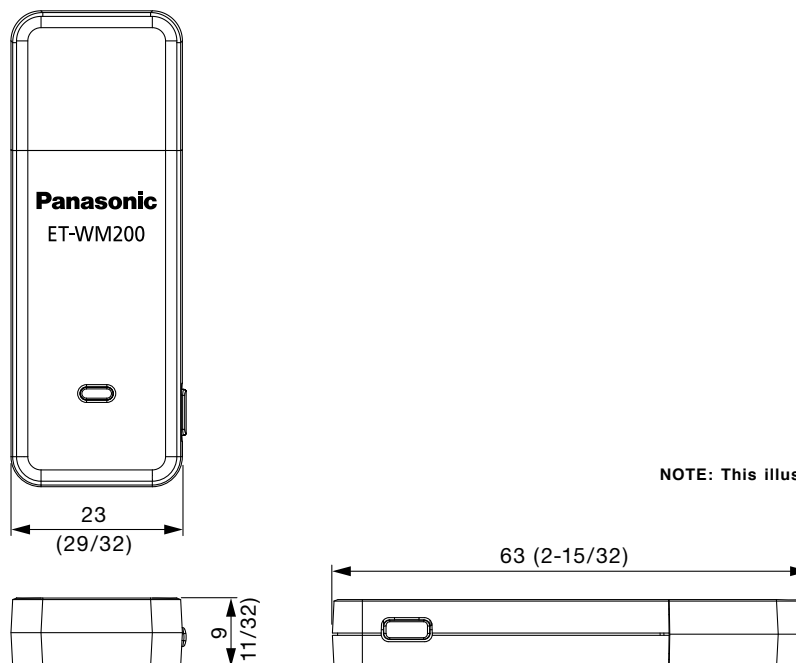

unit : mm (inch)  
NOTE: This illustration is not drawn to scale.

DLP and the DLP logo are trademarks of Texas Instruments.  
Weights and dimensions shown are approximate. Specifications subject to change without notice.