

Panasonic

January 2025

IT/IP Platform "KAIROS" Product Lineup and Specification Comparison Chart

KAIROS

Incredible Productivity



Kairos Core (Main Frame) Lineup and Specification Comparison

Product Name Model Number	Kairos Core 2000 AT-KC2000S1	Kairos Core 2000 AT-KC2000	Kairos Core 200 AT-KC200	Kairos Core 200 AT-KC200L1
Product Image				
Rear Panel Connectors				
MSRP				
Number of Video I/O				
Agile Input Routing		√		√ *3
Smart Routing *1		√		— *3
ST 2110	1.5G 3G 4K	64 in / 40 out	32 in / 40 out 8 in / 10 out	64 in / 40 out *3 32 in / 40 out *3 8 in / 10 out *3
ST 2022-7 Redundancy	√ No halving of both input/output		√ No halving of input, halving of output	√ No halving of input, halving of output *3
SDI *4*5	1.5G 3G 4K	Max. 16 in / 8 out *4	Max. 32 in / 16 out *4	24 in / 12 out (Max. 32 in / 16 out) *5 24 in / 12 out (Max. 32 in / 16 out) *5 12 in / 6 out (Max. 16 in / 8 out) *5
NDI® High Bandwidth (HD only)			2 in / 2 out, 16 CH audio for each	
SRT/RTSP/RTP/RTMP (HD only)		16 in / 4 out (only input for RTSP)		8 in / 2 out (only input for RTSP)
I/O Terminals				
QSFP (ST 2110, PTP sync)	100G QSFP28 x 4		100G QSFP28 x 2	Optional support, 100G QSFP28 x 2 *3
SDI IN/OUT	Micro BNC x Max. 24 *4		Micro BNC x Max. 48 *4	Micro BNC x Max. 36 (Max. 48 with option) *5
REF IN/OUT	Micro BNC x Max. 4 *4		Micro BNC x Max. 8 *4	Micro BNC x Max. 6 (Max. 8 with option) *5
Canvas				
Canvas	Up to 12K (66 M-pixels)		Up to 8K (32 M-pixels)	
Player				
Still Store	32 GB storage, up to 4K		7 GB storage, up to 4K	
RAM Player (uncompressed)	8 CH, 86 GB storage *6	8 CH, 96 GB storage *6	8 CH, 32 GB storage *6	8 CH, 32 GB storage
Clip Player (compressed)	2 CH, 850 GB storage (share with audio player), AVC-Intra/H.264/DNxHD/ProRes		2 CH, 400 GB storage (share with audio player), AVC-Intra/H.264/DNxHD/ProRes	
Audio Player (compressed)	4 CH, 850 GB storage (share with clip player), WAV/MP3/Ogg/FLAC/AIFF		4 CH, 400 GB storage (share with clip player), WAV/MP3/Ogg/FLAC/AIFF	

*1: When using the Smart Routing function, up to 64 inputs can be set and operated virtually, regardless of video format.

*2: Requires software version 1.7.1 or later.

*3: Please contact your distributor for details on using ST 2110 inputs and outputs on the AT-KC200L1.

*4: The optional AT-KC20M1 SDI I/O boards are required.

Each board has 8 input terminals, 4 output terminals and REF IN/OUT (max. 8 inputs/4 outputs in FHD/HD). Up to four boards can be installed on the AT-KC2000/200 and up to two boards on the AT-KC2000S1. The numbers of input/output shown here are the maximum numbers that can be loaded. Installation of the optional board is carried out by the dealer. Always consult your dealer for installation.

*5: Three boards are preinstalled on the AT-KC200L1. One additional board can be installed. Installation of the optional board is carried out by the dealer. Always consult your dealer for installation.

*6: Max. RAM capacity is reduced with SDI I/O boards installed. The maximum capacity is reduced by 2 GB when updating to Ver. 1.8. For details, please check SDI I/O board web page.

Kairos Core (Main Frame) Specifications Common to the Entire Lineup

General

Power Requirement, Current Consumption	AC IN x 2, 100-127 V/200-240 V, 50/60 Hz, 10.0 A / 5.0 A Redundant Power Supply
Operating/Storage Temperature	5 to 35 °C / -20 to 60 °C
Operating Humidity	10% to 90%, no condensation
Weight, without accessories & options	Approx. 17 kg / 37.47 lb, AT-KC200L1: approx. 17.8 kg / 39.24 lb
Dimensions (W x H x D)	430 mm x 176 mm x 505 mm / 16-15/16" x 6-15/16" x 19-7/8" (4 RU)
OS	Linux

Video/Audio Format

4K	3840 x 2160	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.98p
FHD	1920 x 1080	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.98p, 60i, 59.94i, 50i
HD	1280 x 720	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.98p
SD NTSC*7	720 x 480	59.94i
SD PAL*7	720 x 576	50i
DCI 2K*7	2048 x 1080	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.98p
DCI 4K*7	4096 x 2160	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.98p
16:9*7	1366 x 768, 1600 x 900	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.98p
4:3*7	640 x 480, 1024 x 768, 1400 x 1050, 1600 x 1200	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.98p
16:10*7	1280 x 800, 1440 x 900, 1680 x 1050, 1920 x 1200, 3840 x 2400	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.98p
5:4*7	1280 x 1024	60p, 59.94p, 50p, 30p, 29.97p, 25p, 24p, 23.98p
Color Model and Bit Depth	YCbCr 4:2:2 - 8/10/12 bit YCbCr 4:4:4 - 8/10/12 bit *7 RGB - 8/10/12 bit *7 RGBA - 8/10/12 bit *7 Key - 8/10/12 bit *7	
Video IP Transmission Format	ST 2110-20	
Audio Format	ST 2110-30(AES67), 48kHz/24bit	

I/O Terminals

DisplayPort	DisplayPort 1.4 x 4, for Multiview Output External converters are required for video output.
LAN	RJ-45 x 2, 1 GbE
HDMI IN/OUT	Use external converters. Please refer to "KAIROS Alliance Partners/Tested Third Party Products".
VGA (for system installation)	Dsub-15 pin
USB (for system installation)	USB 3.2 Gen1 Type-A x 4

Synchronization

PTP Sync	QSFP and GbE, both ports supported *8
FS (Frame Synchronizer)	All input channels, always ON (without ON/OFF)
Frame Delay	0 frame to 12 frame, by 1-frame step
Latency	Min. 1-frame

Tally, External Device Support, Supported Standards and Protocols

Tally	6-color Independent Tally Indicators, NDI® Tally, Compatible External Tally Box
Supported Tally Protocol	TSL 5.0, Compatible with Panasonic PTZ Camera and AK-UC4000 4K Studio Camera.
Connectable Control Panel	Total 16 units (AT-KC10C1 or AT-KC10C2, each up to 8 units). Up to two Kairos Core units can be operated from one control panel *9
PTZ Control	Panasonic PTZ Camera
Supported Standards and Protocols	REST API, Protocol and command tables is available from the PASS KAIROS Website. Ross Talk *10, Optional AT-SFE01 is required. TSL 5.0 NMOS *8*11, Optional AT-SFE03 is required. AMP (Advanced Media Protocol) SNMP *12 ST 2110 *8 (ST 2110-10, ST 2110-20, ST 2110-30) HTML5 Graphics *9

*This is only a partial list. For details and supported KAIROS versions, please refer to our website "KAIROS Alliance Partners/Tested Third Party Products".

Functions

Multiviewer	HD/4K x 4 out, max. 36 PiP for each Display: GPU Meter, Audio Level Meter, Clock, Vectorscope, Waveforms, etc.
Number of Layer	No restriction, depend on GPU performance, Visible usage with GPU meter
Scene (ME)	No restriction, depend on GPU performance, Visible usage with GPU meter
Key	No restriction, depend on GPU performance, Visible usage with GPU meter
Effect	Luminance Key, Chroma Key, DVE (2D/2.5D), Soft Border, Corner Fix, Color Correction, Crop, Film-look Effect*12, Glow Effect*12 etc.
Transition	Multimix, Offset Transition, Transition Effects
Macro	Scene-Specific Macros, LUA Script Support
Color Mat	Bicolor Wash Mat, Test Pattern
Other Functions	Audio Mixer *13, Title Generator, Snapshot, User Management Function

*Functions listed here are only a part of the features. For details, please check our website.

*7: Requires software version 1.8. Supported only with IP input/output.

*8: Please contact your distributor for details on using ST 2110 inputs and outputs on the AT-KC200L1.

*9: Requires software version 1.8.

*10: RossTalk, Ross and XPression, are trademarks or registered trademarks of Ross Video Limited.

*11: NMOS (Networked Media Open Specifications) is a protocol standardized by AMWA (Advanced Media Workflow Association) for controlling and managing devices via IP networks.

*12: Requires software version 1.7.0 or later.

*13: Optional AT-SF005 is required.

• NDI® is a registered trademark of Vizrt NDI AB in the United States and other countries.

KAIROS System Equipment

Kairos Control (Control Panel)



AT-KC10C1 Kairos Control (Control Panel)
24XPT style, standard type control panel. Can be connected to up to two Kairos Core units with Ver. 1.8.

- Power Requirement: DC 12V,* XLR 4 pin x 2, Redundant Power Supply •Current Consumption: 8.0 A •Dimensions: 1140 mm x 94 mm x 420 mm (44-7/8" x 3-45/64" x 16-17/32"), W x H x D, excluding protrusion •Weight: Approx. 15.4 kg (33.95 lb)
- Terminals: LAN (RJ-45 x 1, 1 GbE), USB 2.0 (type A) x 2 (1 on Rear Panel, 1 on Control Panel)



AT-KC10C2 Kairos Control (Control Panel)
12XPT style, compact type control panel. Can be connected to up to two Kairos Core units with Ver. 1.8.

- Power Requirement: DC 12V,* XLR 4 pin x 2, Redundant Power Supply •Current Consumption: 4.0 A •Dimensions: 600 mm x 90 mm x 420 mm (23-5/8" x 3-35/64" x 16-17/32"), W x H x D, excluding protrusion •Weight: Approx. 8.5 kg (18.74 lb)
- Terminals: LAN (RJ-45 x 1, 1 GbE), USB 2.0 (type A) x 1

* AC adapter not included. Please check recommended products.

KAIROS Option

Optional Hardware

AT-KC20M1 SDI I/O Board
Enables SDI (micro BNC) input/output. Each board has 8 inputs, 4 outputs, and REF input/output. 1 to 4 boards can be installed on a single Kairos Core.

- Installation on the main frame is carried out by the dealer. Always consult your dealer for installation.
- * When installed, max. capacity of the RAM player is reduced. For details, please check our website.



SKAARHOJ's Panasonic Special Model

PAN-MKO-V2B-BU	Master Key One *1
PAN-MK48-V1B-BU	Master Key 48 *1
PAN-WB-V2B-BU	Wave Board *2
PAN-QSP-V1B-BU	Quick Shot Pro *2
PAN-QS-V1B-BU	Quick Shot *2

*1: Requires version 1.7 or later. Operation-verified in Oct. 2024
*2: Requires version 1.8. Operation-verified in Jan. 2025

• SKAARHOJ's Panasonic Special Models are not products handled by Panasonic Connect Co. Panasonic Connect does not guarantee the specifications, etc. Please contact SKAARHOJ <<https://www.skaarhoj.com/>> or SKAARHOJ's resellers <<https://www.skaarhoj.com/discover/reseller-list>> for more information about the product. Please contact your area's Panasonic Sales Companies for purchase.

Kairos Creator (GUI Software)



AT-SFC10 Kairos Creator (GUI Software)
Intuitive GUI for easy configuration of inputs/outputs, scenes, layers, etc.

- OS: Windows 10/11, macOS Ventura/Sonoma/Sequoia
- * Starting with version 1.8, Kairos Creator license is bundled with Kairos Core. Please contact your distributor to purchase.

Kairos Emulator
Free software that allows production and training with Kairos Creator in offline environments such as outside the studio or at home.




- OS: Windows10/11
- * Requires version 1.7.0 or later.
- * Some functions can't use on Kairos Emulator.

Kairos Creator Subset Software
Kairos Media, Kairos Painter, Kairos Audio Mixer*
Free of charge for Kairos Creator users.

- OS: Windows10/11
- * The AT-SF005 Audio Mixer Option is required for use.

Optional Software



AT-SFTC10 Touch Control Panel Software
Intuitive operation by touching the multi-viewer screen.

- OS: Windows10/11
- * Requires version 1.5 or later.

AT-SFCM10 Kairos Core Manager • OS: Windows10/11

AT-SF005 Audio Mixer Option

AT-SFE01 RossTalk Option

AT-SFE03 NMOS Option For use on AT-KC200L1, please contact your distributor.

• RossTalk, Ross and XPression, are trademarks or registered trademarks of Ross Video Limited.

• NMOS (Networked Media Open Specifications) is a protocol standardized by AMWA (Advanced Media Workflow Association) for controlling and managing devices via IP networks.

KAIROS; Platform for Innovative Live Video Production

Flexible Input/Output


Support for extensive baseband and IP packet signals, video formats, and inputs and outputs.

Unlimited Expression

KAIROS's unlimited scenes and layers combine with CANVAS's unrestricted aspect ratios for highly flexible video production.

Advanced Operation

IP connection enables operation via multiple control panels as well as remote operation. Software architecture realizes high system scalability.

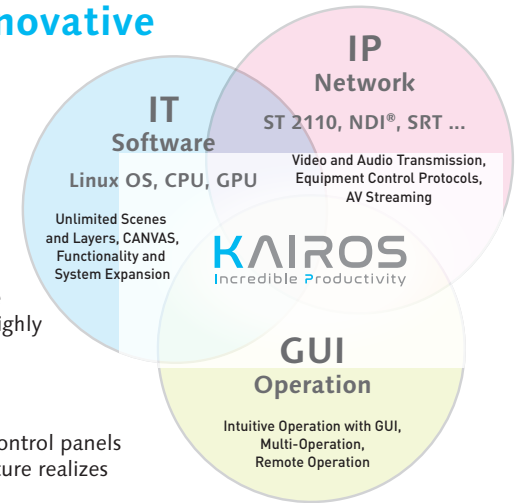

Three technologies that make up KAIROS

KAIROS Alliance Partners

KAIROS leverages ever-expanding IT ecosystems for function expansion via new software and linkage with external devices. To further accelerate such linkage, Panasonic collaborates with diverse IT companies, video equipment manufacturers and suppliers.




Update



See website for latest list of KAIROS Alliance Partners and certified devices.

KAIROS Case Studies

See website for many other case studies.




Streamlining sports production with KAIROS

GlobeStream Media & LA Tech
(Rental & Staging)
Country: U.S.A.
Installation: July 2024



IP-based production provides scalability for music festivals

CPL & Camper Calling2024
(Rental & Staging)
Country: UK
Installation: August 2024



More expressive live streaming of e-sports competitions

PLAYBRAIN Inc.
(E-sports management)
Country: Japan
Installation: March 2022



Panasonic Entertainment & Communication Co., Ltd.

1-10-12 Yagumo-higashi-machi, Moriguchi City, Osaka 570-0021, Japan

Specifications are subject to change without notice.



For more information, please visit Panasonic web site <https://pro-av.panasonic.net/en/gr/>