



The LFV9 Series Delivers Seamless, Multi-screen Displays for Dynamic, Large-Screen Use

■ Main Features



01 | **Ideal Picture Quality**

Excellent visibility on multiple screens with high-grade panels. The panel has a wide viewing angle and reduced color changes.

02 | **High Reliability**

Highly durable components, 24-hour continuous operation. Failover and Failback safeguards maintain image display.

03 | **Easy Configuration**

Designed to reduce installation time, labor and maintenance. Dot-by-dot display of 4K images in 2 x 2 configuration.



	TH-55LFV9
Screen Size	55-inch class
Brightness	500 cd/m ²
Bezel	2.25 mm / 0.089" (L/T), 1.25 mm / 0.050" (R/B)
Bezel to Bezel	3.5 mm / 0.14"
Resolution	1920 x 1080

Hi-resolution panel Improves Off-Axis Visibility

High-resolution panel technology ensures that pictures displayed on screen remain clearly visible even when observed from oblique angles: vital for signage applications as well as in control rooms where clear visibility is necessary at all times.




Failover and Failback Safeguards for Mission Critical Situations

If the main video and audio signals are interrupted, the system immediately switches to alternative signals. If the main signals are restored, the original image is displayed. This makes it ideal for mission critical control rooms and surveillance centers.



Multiscreen Output of 4K Images

By using a daisy chain connection with DisplayPort in a 2x2 multiscreen configuration, 4K images can be displayed (Dot-by-Dot) without the need for scaling up or down. This gives you digital signage with higher definition.

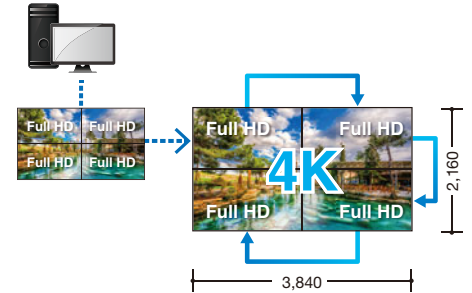

*An output device that supports DisplayPort 1.2MST output (a graphic board in the case of a PC) is required.

Specifications

Model	TH-55LFV9		
Display Panel	Panel size	55-inch class (1387 mm/54.6-inch)	
	Aspect ratio	16:9	
	Effective display area (W x H)	1209 x 680 mm / 47.6" x 26.7"	
	Resolution	1920 x 1080	
	Brightness (typ.)	500 cd/m ²	
	Contrast ratio (typ.)	1200:1	
	Response time (typ.)	9.0 ms	
	Viewing angle [(T/B)/(L/R)]	178° / 178° (CR≥10)	
	Panel Surface Treatment	Advanced Anti-Glare (Haze 28 %)	
	Terminals	HDMI In	Type A Connector x 2
VIDEO In		BNC x 1 (Shared with Component In)	
Component In		BNC x 1 set (Shared with VIDEO In)	
DisplayPort In		DisplayPort x 1	
DisplayPort Out		DisplayPort x 1	
DVI-D In		DVI-D 24-pin x 1 (Female)	
PC In		Mini D-sub 15-pin x 1 (Female)	
DVI-I Out		DVI-I 29-pin x 1 (Female)	
Serial In/Out		2.5 mm Phone Jack x 1 / x 1	
IR In/Out		2.5 mm Phone Jack x 1 / x 1	
Audio In 1		Pin Jack (L+R) x 1 set (Shared with COMPONENT/VIDEO In) 0.5 V [rms]	
Audio In 2		Stereo Mini Jack (M3) x 1 (Shared with PC/DVI-D In) 0.5 V [rms]	
Audio Out		Stereo Mini Jack (M3) x 1 0.5 V [rms] Variable (-∞ ~ 0 dB) (1 kHz 0 dB Input, 10 kΩ Load)	
LAN		RJ45 x 1, 10 BASE-T / 100 BASE-TX, Compatible with PjLink™	
USB		USB Connector (TYPE-A) x 1, DC 5V/500mA (USB2.0)	
Power requirements		110-127 V AC, 50/60 Hz, 220-240 V AC, 50/60 Hz	
Power consumption		185 W	
Power off condition	Approx. 0 W		
Standby condition	Approx. 0.5 W		
Dimensions (W × H × D)	1213.4 x 684.2 x 98 mm / 47.8" x 27.0" x 3.9"		
Weight	27 kg / 59.8 lbs.		
Bezel width	2.25 mm / 0.089" (L/T), 1.25 mm / 0.050" (R/B)		
Wall-hanging pitch	400 x 400 mm (15.8" x 15.8") VESA compliant		
Operating time	24 h/day		
Operating environment	Temperature	0 °C-40 °C / 32 °F-104 °F: Altitude 0-1400 m / 4593 ft, 0 °C-35 °C / 32 °F-95 °F: Altitude 1400-2800 m / 4593-9186 ft	
	Humidity	20-80% (Non condensation)	

Optional Accessories

- **Installation Mount**
TY-VK55LV2
- **Early Warning Software¹**
ET-SWA100/105 Series²
1: Multi Monitoring & Control Software ver.2.1 or later required.
2: Part number suffix may differ depending on the license type.
- **Auto Display Adjustment Upgrade Kit**
TY-VUK10
• Video Wall Manager Ver.1.10 or later required.

Software (free)

- **Multi Monitoring & Control Software (Ver.2.1)**
* Windows® only.
- **Video Wall Manager**

Panasonic CONNECT

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability may vary on region and country. This product may be subject to export control regulations. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other trademarks are the property of their respective trademark owners. ©Panasonic Connect Co., Ltd. 2022. All rights reserved.



For more information about Panasonic Professional Displays, please visit:

Display Global Website – panasonic.net/cns/prodisplays
YouTube – www.youtube.com/user/PanasonicProDisplay

Note: Following the shift of the Panasonic Group to a holding company system, the Connected Solutions Company of the Panasonic Corporation has changed to Panasonic Connect Co., Ltd. as of April 1, 2022.

All information included here is valid as of April 2022.

CT22-G01PF-LFV9 Printed in Japan.