


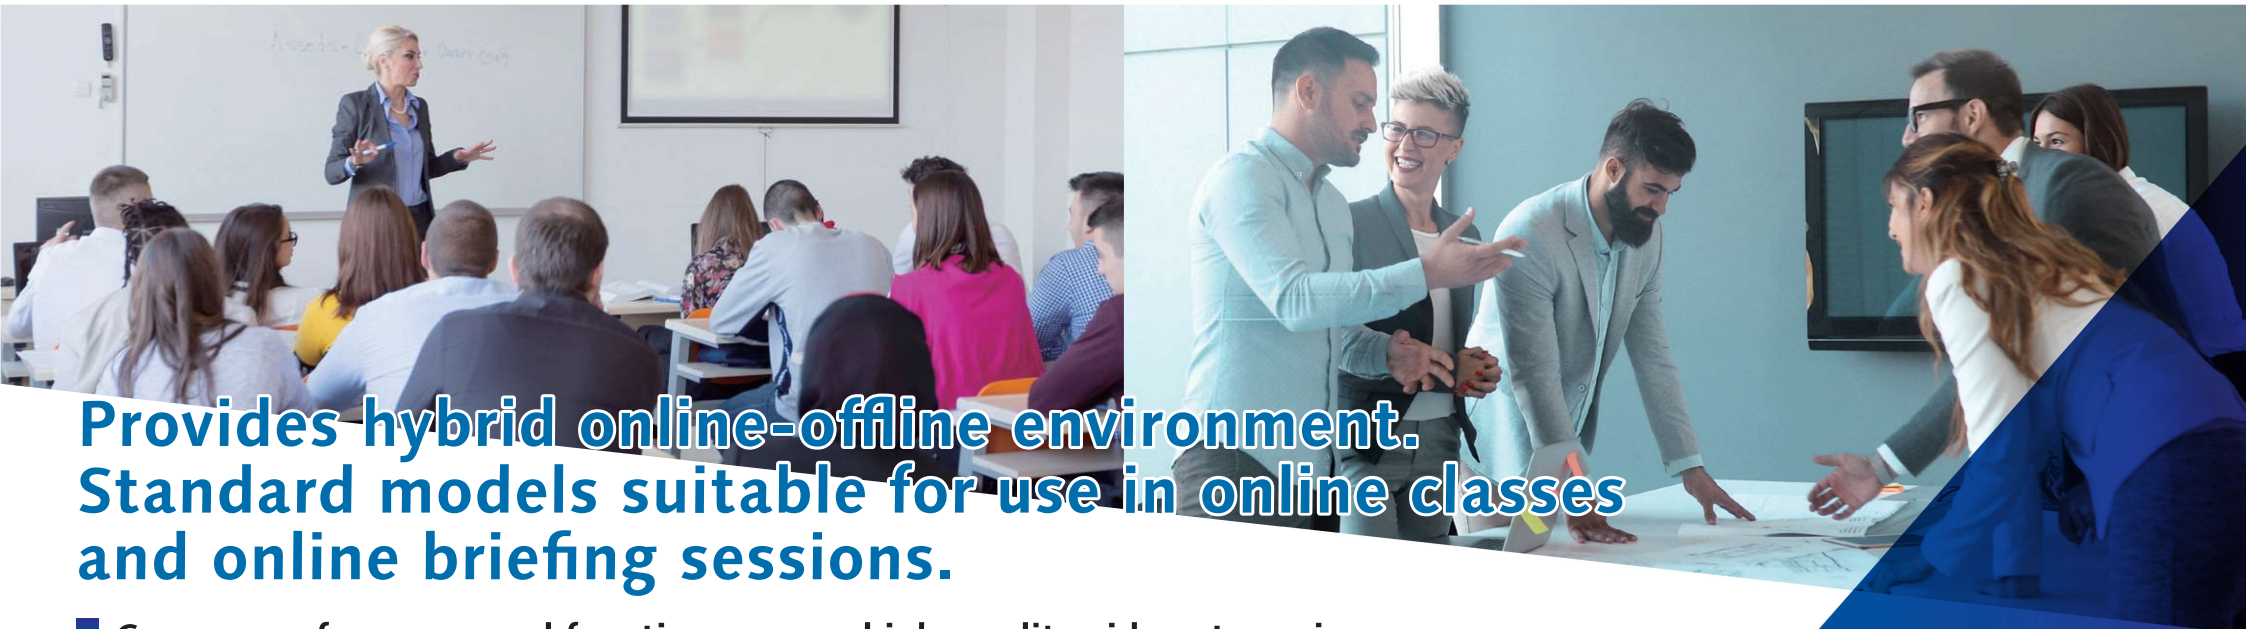

**Provides hybrid online-offline environment.
Standard models suitable for use in online classes
and online briefing sessions.**

Camera performance and functions assure high-quality video streaming.

Featuring 4K resolution, horizontal wide-angle coverage of up to 74.1° and a maximum 24x optical zoom, the UE50/40 maintains superb quality and functionality for video streaming. The Auto Tracking Software and image stabilizer functions contribute to stable video streaming.

Small size, quietness and stability for use anywhere.

The UE50/40 are lightweight and compact. The new direct-drive motor with an operating sound of NC25 or lower achieves highly accurate stopping position precision and enables accurate camerawork. They can be installed and used at any video shooting site. The UE50/40 supports NDI®|HX*¹ and SRT*² to assure stable and safe video streaming.

*¹ In this instance, NDI® is used to indicate low latency with high bandwidth NDI®, NDI®|HX is used to indicate high efficiency low bandwidth NDI®|HX. In the NDI®|HX mode, 4K video signals cannot be output.
AW-UE50/AW-UE40 supports NDI®|HX version 2 and Full HD output.
² Abbreviation for Secure Reliable Transport

Excellent system flexibility to achieve smart wiring and smooth operation.

By using a Panasonic remote camera controller or linking with available software, the camera can be easily installed, managed and operated. The UE50/40 are suitable for replacing an existing camera or for expanding your current system.



Invaluable features and functions to deliver flexibility to any video shooting needs

Supports SRT* to ensure stable video streaming



The UE50/40 supports SRT, a next-generation video transport protocol that provides robust security and works well, even with an unstable network environment.

*Abbreviation for Secure Reliable Transport

Use in online conferences as web camera

The UE50/40 supports UVC* so the video and audio signals can be transmitted over USB. By using the PTZ Virtual USB Driver software and connecting with a LAN cable, it is possible to use the UE50/40 as a USB camera. This can also be linked with Panopto.

*UVC: USB video class

A standard for connecting video-handling devices such as webcams to a computer via USB.

Supports 4 interfaces

The UE50/40 supports four output interfaces—3G-SDI*, HDMI, IP and USB—so it can be used with a wide range of devices.



*3G-SDI is supported only by AW-UE50.

Accessories



Remote Camera Controller AW-RP150

High operability ensured through touch-panel GUI monitor and a new type of joystick.



Remote Camera Controller AW-RP60

Equipped with a GUI menu screen for clear visibility and a joystick for intuitive control.



Auto Tracking Software Key AW-SF100/AW-SF200

Face recognition and human body detection for high precision and smooth tracking control for natural-looking video.



Visual Preset Software Key AW-SF300

GUI screen that enables the subject of multiple PTZ Cameras to be switched with a single click of an icon.

Supports NDI®|HX version 2

The UE50/40 realizes effective IP transmission of high-quality videos even with limited bandwidth. Since the video source can be accessed from any device on the same network, even devices with unknown IP addresses are automatically recognized.

*NDI® is a new IP protocol developed by NewTek, Inc. This protocol supports live video production workflows.

*NDI® is a registered trademark of NewTek, Inc. in the United States.

Single controller* can control up to 200 camera units

By using the free software, PTZ Control Center, or connecting a Panasonic remote camera controller, multiple remote camera units can be controlled at once from the single controller for easy management and control.

*This function can be used only with Panasonic PTZ camera controllers AW-RP150 and AW-RP60.

Other features

- Unit design makes the lens unnoticeable
- Equipped with Privacy Mode which positions the lens toward the back when on standby
- Equipped with Optical Image Stabilizer (OIS)
- Web GUI for camera control

Specifications

Comprehensive			
Power Requirements		DC 12 V ± 10 % (10.8 V to 13.2 V) (Supplied AC adapter)	
PoE+		IEEE 802.3 at compliant : DC42-57 V	
Current Consumption		1.8 A (AC adaptor input) , 0.6 A (PoE+ power supply)	
Mass		Approx. 1.8 kg (3.97 lbs) (excluding ceiling mounting bracket)	
External Dimensions		Width 160.0 mm × Height 192.1 mm × Depth 166.0 mm (6.299 inches × 7.563 inches × 6.535 inches) (Excluding protrusions, cable cover, ceiling mounting bracket)	
Camera Part			
Effective Pixels		approx. 8.49 million pixels	
Image Sensors		1/2.5-type MOSx1	
Lens		Electric 24 x optical zoom F1.8 ~ F4.0 (f = 4.12 mm ~ 98.9 mm , 35 mm conversion : 25.0 ~ 600.0 mm)	
Zoom Magnification		• Optical zoom: 24 x • i.Zoom UHD 28 x , FHD 36 x • Digital extender zoom: 1.4 x , 2 x	
Angle of View Range		Horizontal angle of view: 74.1° (wide) to 3.3° (tele) Vertical angle of view: 46.0° (wide) to 1.9° (tele) Diagonal angle of view: 81.8° (wide) to 3.8° (tele)	
Horizontal Resolution		UHD: 1,500 Typ (Center area) FHD: 1,000 Typ (Center area)	
Output Format	SDI	HD	1080/59.94p, 1080/50p, 1080/59.94i, 1080/50i, 1080/29.97p(Native), 1080/25p(Native), 1080/23.98p(over59.94i), 1080/29.97psF, 1080/25psF, 1080/23.98psF, 1080/24p(Just), 1080/23.98p(Native), 720/59.94p, 720/50p
	HDMI	4K	2160 / 29.97p (Native), 2160 / 25p (Native), 2160 / 24p (Just), 2160 / 23.98p (Native)
		HD	1080/59.94p, 50p, 1080/59.94i, 50i, 1080/29.97p(Native), 25p(Native), 23.98p(over59.94p), 1080/24p(Just), 23.98p(Native), 720/59.94p, 50p
Output			
Video Output	HDMI	HDMI 1.4 connector, 4:2:2 / 10 bit	
	3G-SDI OUT	SMPTE 292 M , 424 M / 75 Ω (BNCx1)	—
Input/Output			
Input/Output Connector	LAN	LAN terminal for IP control (RJ-45)	
	RS-422	CONTROL IN RS422A (RJ-45)	
	USB	USB2.0 DEVICE, Type C connector, No USB bus power functionality •UVC (USB Video Class) support only *UVC1.0, UAC1.0	
	MIC/LINE input	AAC compatibility (compatible with IP only), Ø3.5 mm stereo mini jack	
		During MIC input	Input level: -40 dBV (0 dB = 1 V / Pa, 1 kHz), Supply voltage: 2.5 V ± 0.5 V (plug-in power compatible)
		During LINE input	Input level: -10 dBV
Rotating Platform Part			
Pan Operating Range		± 175°	
Tilt Operating Range		-30° ~ 90°*1	
IP Streaming			
Image Streaming Mode		JPEG (MJPEG), H.264, H.265, NDI® HX*2,3,4,5 version 2 (H.264)	
Image Resolution		1920x1080, 1280x720, 640x360, 320x180	
Image Transmission Setting	H.264	Transmission Type: Unicast port (AUTO), Unicast port (MANUAL), Multicast port Frame rate: [At 60Hz] 5fps / 15fps / 30 fps / 60 fps , [At 50Hz] 5 fps / 12.5 fps / 25 fps / 50 fps Max Bit Rate: 512 kbps / 768 kbps / 1024 kbps / 1536 kbps / 2048 kbps / 3072 kbps / 4096 kbps / 6144 kbps / 8192 kbps / 10240 kbps / 12288 kbps / 14336 kbps / 16384 kbps / 20480 kbps / 24576 kbps /	
	H.265	Transmission Type: Unicast port(AUTO), Unicast port (MANUAL), Multicast port Frame rate: [At 60Hz] 30 fps / 60 fps , [At 50Hz] 25 fps / 50 fps Max Bit Rate: Same specifications as H.264	
	NDI® HX*5 version 2	Transmission Type: TCP / UDP, Unicast / Multicast	

*1The main unit may appear in the video depending on the pan/tilt position.

*2 NDI® is a new protocol developed by NewTek, Inc. that supports IP video production workflow.

*3 NDI® is a registered trademark of NewTek, Inc. in the United States and other countries.

*4In this instance, NDI® is used to indicate low latency with high bandwidth NDI®, NDI®|HX is used to indicate high efficiency low bandwidth NDI®|HX. In the NDI®|HX mode, 4K video signals cannot be output. AW-UE50/AW-UE40 supports NDI®|HX version 2 and Full HD output.

*5 For details, please contact a sales representative of Panasonic. Regarding the purchase of license, refer to "About the version upgrade of the software in the main unit to add NewTek NDI®|HX compatibility to the 4K/HD integrated camera." To use NDI®|HX, the driver must be installed and activated."

*This specification is a part. Please see the website for details.



For more information, please visit
Panasonic web site

https://pro-av.panasonic.net/en/?cid=ad-gr-qz_mprd_mebc-ue80_211012_all_s_g1



Broadcast and
Professional
AV Website



Contact
Information



Facebook



Mobile App

Panasonic®

Panasonic Connect Co., Ltd.

2-15 Matsuba-cho, Kadoma, Osaka 571-8503 Japan

SP-UE50/40PEWEB3 202204U



Factories of Panasonic Connect Co., Ltd. have received ISO14001:2015-the Environmental Management System certification. (Except for 3rd party's peripherals.)