

Description

This board is designed for use with a Panasonic projector. It enables the input of a HD-SDI (SMPTE 292M-compliant) and SD-SDI (SMPTE 259M-C).


Specifications

Power supply:	Provided from the projector
Terminals:	
SERIAL IN (SDI IN 1/2)	BNC × 2 SD-SDI signal (YCbCr 4:2:2 10-bit), SMPTE 259M-C compliant: 480i, 576i Single-link HD-SDI signal (YPbPr 4:2:2 10-bit), SMPTE 292M compliant: 720/50p, 720/60p, 1035/60i, 1080/50i, 1080/60i, 1080/25p, 1080/25psf, 1080/24p, 1080/24psf, 1080/30p, 1080/30psf
SERIAL OUT (SDI OUT)	BNC × 1, active through
Dimensions (W × H × D):	187 × 30 × 110 mm (7-3/8" × 1-3/16" × 4-11/32")
Weight:	Approx. 160 g* (3.3 oz*)
Operating temperature:	0°–40°C (32°–104°F)
Operating humidity:	10%–80% (no condensation)
Applicable projector:	PT-EX16K

* Average value. May differ depending on models.

NOTE: Use connection cables of 5CFB or higher (ex. 5CFB, 7CFB, 5CFTX, etc.).

Dimensions

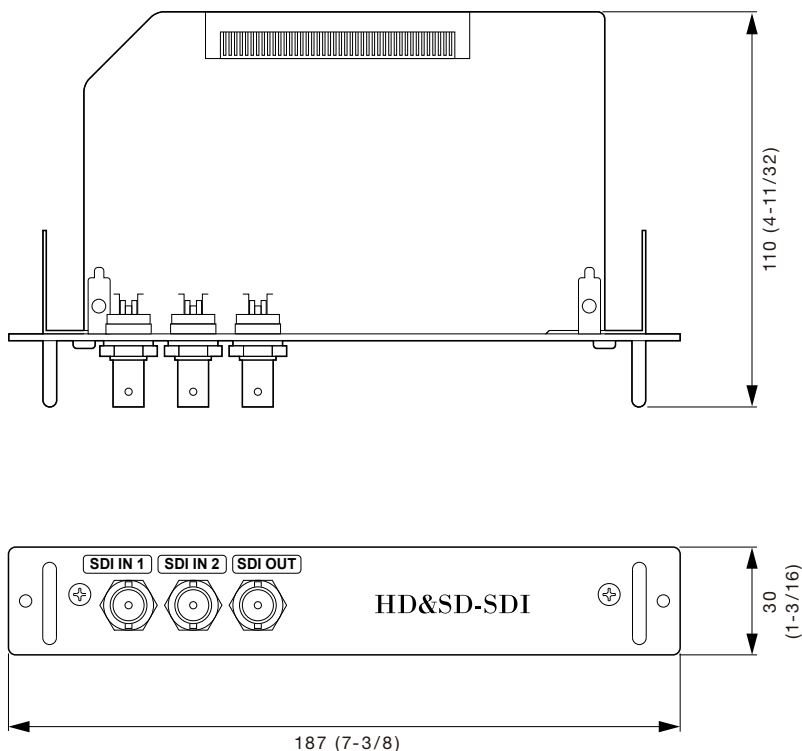

unit : mm (inch)

NOTE: This illustration is not drawn to scale.

Weights and dimensions shown are approximate. Specifications subject to change without notice.