

S P E C F I L E

Product Number : **ET-FMP50**

Product Name : **Media Processor
(Box-type)**





Overview

This product is a media processor featuring camera-based blending/black-level adjustments and 4K media playback capability. It eases the burden on your team when installing and adjusting multi-projection attractions, making operations more efficient.

Hardware Highlights

- Compact box-type
- Up to 4 x 1920 x 1080/60p outputs¹ per device
- Supports NDI[®](Max. 3840 x 2160/60p) and Dante[®](2-channel)² AVoIP protocol
- Seamless video synchronization among multiple media processors
- Supports signal input of up to 18 million pixels (max. length 7680 pixels), with resolutions including 7680 x 1920/60p and 4096 x 4096/60p for smoother content production
- Supports video bandwidth up to 300 Mbps
- Compatible with HAP³, H.264, and H.265 codecs
- Compatible with H.264, and H.265 codecs
- Supports MP4, JPEG, BMP, and PNG formats
- Large internal storage: 4TB
- Pixel-based adjustment for unrivaled precision
- Stable Linux[®] operating system
- Optional rack-mounting kits for one or two ET-FMP50 units

Software Highlights

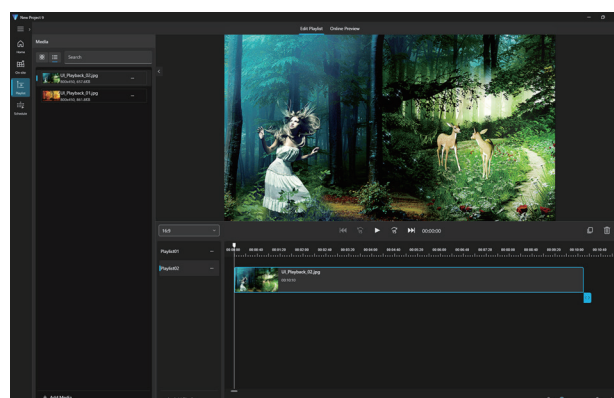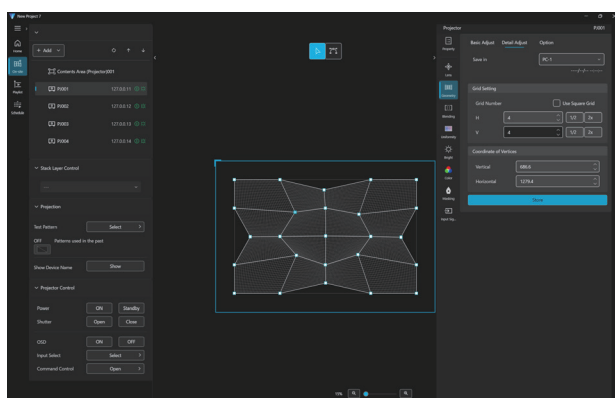

This media processor is compatible with Visual Software Suite 2.0. For detailed specifications, please refer to the Visual Software Suite 2.0 spec file.

¹ When four HDMI™ outputs are used simultaneously
² HAP Q content is not supported.
³ Compatible with HAP 1 and HAP Q.

Specifications

Main unit (Specifications subject to change without notice.)

Type		Box-type
Terminals	LAN	RJ-45 x 1 for network connection 10Base-T/100Base-TX, 1000Base-T, NDI® and Dante®(2 channels) ¹ compatible
	HDMI™ OUT 1/2/3/4	HDMI™ x 4 Audio signal: Linear PCM and sampling frequency: 44.1kHz/48kHz, 16-bit, 2 channels
	Audio OUT	3.5 mm stereo mini-jack 0 V [rms] to 2.0 V [rms] (variable), output impedance 2.2 kΩ or lower
Content compatible with streaming playback NDI®		Image compression method: High Bandwidth NDI®
		Image resolution/frame rate: 3840 x 2160/60 fps, 3840 x 2160/50 fps, 1920 x 1080/60fps, 1920 x 1080/50fps
		Audio signals: Linear PCM and sampling frequency: 44.1kHz/48kHz, 16-bit, 2 channels
Max. video output resolution		3840 x 2160/60p ² x 1 or 1920 x 1080/60p x 4 ³
Video format		HAP H.264 ⁴ , 8-bit, 3840 x 2160 pixels, 60p, YPbPr 4:2:0, 300 Mbps / H.265 ⁵ , 8-bit, 18million pixels (long side of 7680 pixels or less), 60p (including 7680 x 1920/60p, 4096 x 4096/60p), YPbPr 4:2:0, 300 Mbps Color format: RGB Color depth: 8-bit
Audio format		AAC-LC, 16-bit, stereo
Storage		4 TB
Operating system		Linux
Power supply		AC 100V-240V 50Hz/60Hz
Maximum power consumption		64 W
Dimensions	Width	Approx. 210 mm [8 9/32 in]
	Height	Approx. 44 mm [1 23/32 in] (Excluding feet)
	Depth	Approx. 295 mm [11 5/8 in]
Weight		Approx. 2.0 kg (4.41 lbs) (Excluding AC adapter and cord)
Operating environment	Operating temperature	0-40 °C (32-104 °F)
	Operating humidity	10-80 % (no condensation)

1 HAP Q content is not supported.

1 HDMI™ OUT 1 only, HDMI™ OUT 2/3/4 have a maximum resolution of 1920x1080/60p.

2 When four HDMI™ outputs are used simultaneously.

3 Compatible profiles: Baseline, Main, High (4:2:0)

4 Compatible profiles: Main (4:2:0)

Optional Accessories

Rack Mounting Kit for 2	ET-PKFMJ2
Rack Mounting Kit for 1	ET-PKFMJ1

Content that can be registered

You can register the following still image files and movie files as media in this software.

Still image	Extension	Format	Restriction
	jpg/jpeg	JPEG	Number of pixels: Maximum 9600 x 6400 (only baseline supported) YUV format: Only YUV420, YUV422, and YUV444 supported Color mode: Unsupported
	png	Portable Network Graphics	Number of pixels: Maximum 4096 x 4096 Number of bits: 24 Transparent: Unsupported
	bmp	Windows Bitmap	Number of pixels: Maximum 4096 x 4096 (only 1-bit, 4-bit, 8-bit, and 24-bit supported) Following formats are not supported. Run-length encoding, Bit fields, Top to bottom, Transparent data

	Extension	Codec		Restriction ¹	
		Video	Audio	Video	Audio
	mp4	H.264/MPEG-4 AVC H.265/HEVC	MPEG-4 AAC-LC	- Resolution - With H.264/MPEG-4 AVC - Maximum: 3840 x 2160 - Minimum: 240 x 180 - With H.265/HEVC - Maximum: Total number of pixels: 18 million (long side 7680 or less) - Minimum: 240 x 180 - Frame rate 25 fps/30 fps/50 fps/60 fps - Bit rate - Maximum 300 Mbps - YUV format - Only 4:2:0 supported - Supported profiles - With H.264/MPEG-4 AVC²: - Baseline Profile/Main Profile/ High Profile - With H.265/HEVC: - Main Profile³	Sample rate: 44.1 kHz, 48 kHz Channel: 2 ch, 0 ch (no audio) Bit width: 16 bit
Movie	mov	HAP (HAP 1) HAP Q	MPEG-4 AAC-LC	- Resolution - Maximum: 3840 x 2160 - Minimum: 240 x 180 - Frame rate - With HAP (HAP 1): 25 fps/30 fps/50 fps/60 fps - With HAP Q: 25 fps/30 fps - The Snappy codec option is not supported. - HAP Alpha and HAP Q Alpha are not supported.	

¹ Multi-angle video is not supported.

² Constrained Baseline Profile, Extended Profile, and Hi10P/Hi422P/Hi444P are not supported.

³ Following profiles are not supported.


Main 10, Main 12, Main 422-10, Main 422-12, Main 444-8, Main 444-10, Main 444-12

Note


- Some information for still image/movie files can be viewed with a computer where relevant files are accessible.
Operation example
- For Windows computer
1.Right-click a file, and click [Properties].
2.Click the [Details] tab.
- A movie file cannot be used if its playback time is less than ten seconds or its playback time information cannot be acquired.
- The maximum number of characters for content file names is 80 characters.
- Files protected by DRM (Digital Rights Management) cannot be used.
- Some files listed as compatible formats may still not be able to be used.

Main body

Front

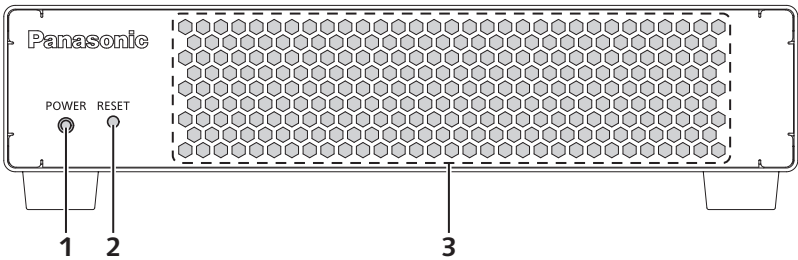


Rear

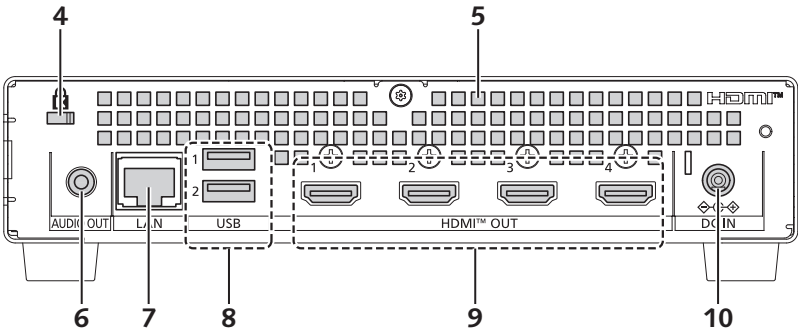

1	Power indicator <POWER> Indicates the status of the device.	6	<AUDIO OUT> terminal This terminal is for outputting audio signals.
2	<RESET> button This button initializes the network settings. If you press and hold the button, the settings of [System] menu → [Network] page are initialized and the device restarts.	7	<LAN> terminal This terminal is for connecting to a network.
3	Air intake vent	8	<USB> terminals These terminals are not used with this device.
4	Security slot This security slot is compatible with Kensington security cables.	9	<HDMI™ OUT 1> terminal / <HDMI™ OUT 2> terminal / <HDMI™ OUT 3> terminal / <HDMI™ OUT 4> terminal These terminals are for outputting HDMI signals.
5	Air exhaust vent	10	<DC IN> terminal Connect the supplied AC adapter.

Sides

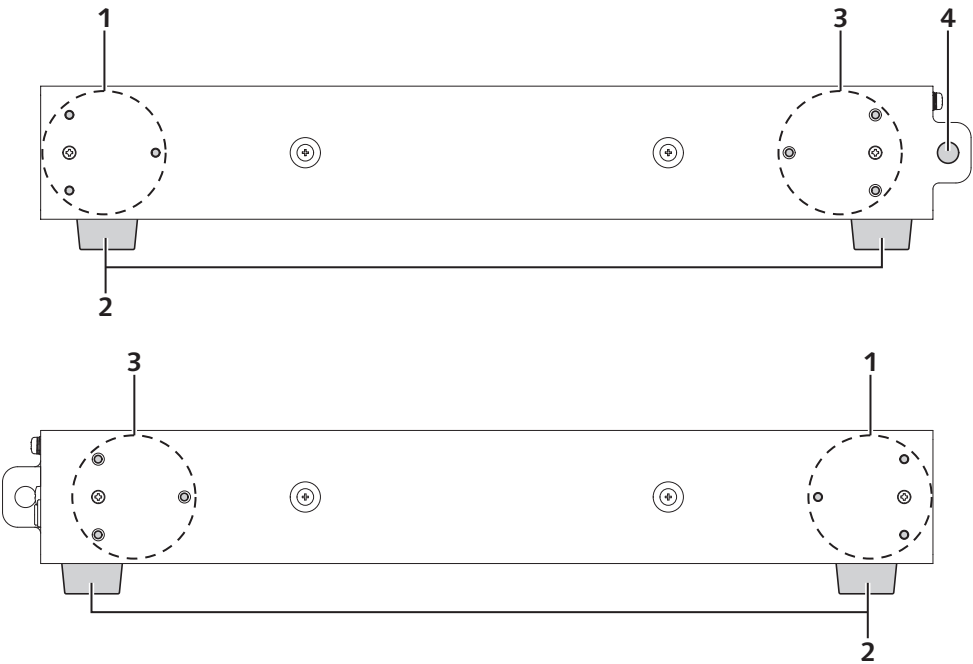


1	Rack mount bracket attachment position Use these three screw holes to mount the device to a rack. Also use them to connect two devices horizontally.	3	Connection angle bracket attachment position Use these three screw holes to connect two devices horizontally.
2	Rubber feet Rubber feet are removable.	4	Wire attachment hole This hole is for attaching a commercially available drop prevention wire. You can also connect a theft prevention wire, padlock, etc.

Attention


- The LAN cable connected directly to this device must be indoors only.

Dimensions

unit : mm [inch]
NOTE: This illustration is not drawn to scale.

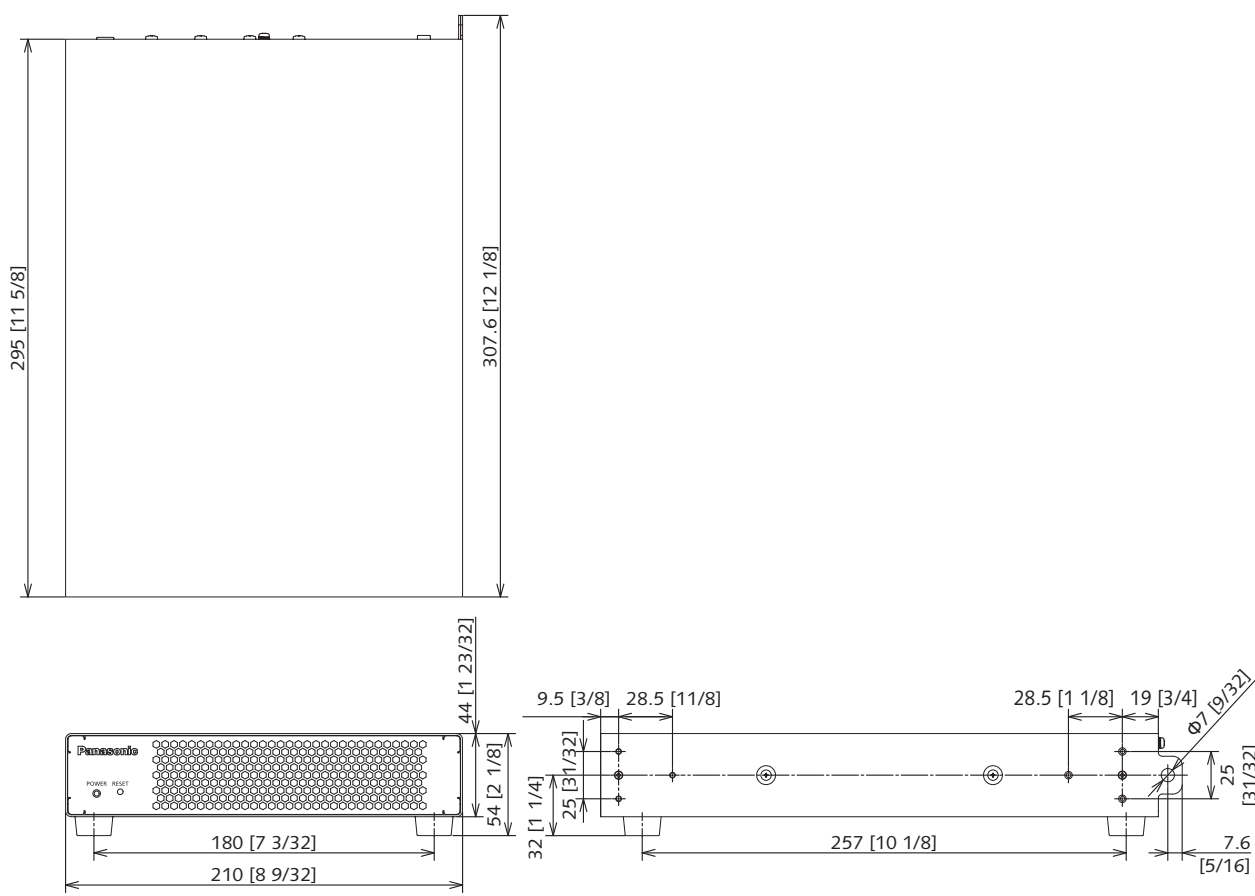

■ When the Rack Mounting Kit (model no.: ET-PKFMJ1) is attached

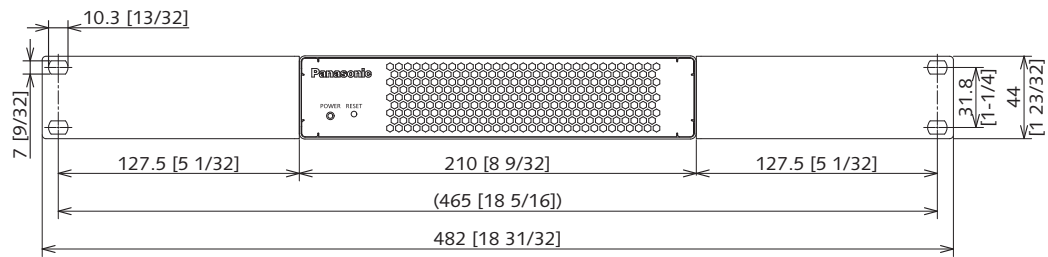

■ When the Rack Mounting Kit (model no.: ET-PKFMJ2) is attached

