


MT Hood

SDM-HDBT-R-UHD

UHD HDBaseT Receiver for SDM-S and SDM-L

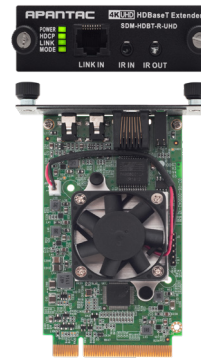

SDM-HDBT-R-UHD

Key Features

- UHD HDBaseT receiver for SDM-S
- Comes with adapter for SDM-L
- Supports HDMI 2.0/HDCP 2.2
- Extends HDMI signal (1080P@12 bit) up to 330 feet (100 meters)
- Extends HDMI (UHD@4:4:4) signals up to 230 feet (70 meters)
- Supports 3D pass-through
- Supports CEC pass-through
- Supports bi-directional RS-232
- Supports all frequency IR control
- Supports LPCM, Dolby True HD and Dolby Digital audio

Related Products

HDBT-1-E-UHD
UHD HDBaseT Transmitter

Specifications

Model	SDM-HDBT-R-UHD
Input	UHD HDBaseT via RJ45
Output	SDM Connector
IR	In/Out
Environment	Operating Temperature: 0C - 50C, Storage: -20C to 60C, Humidity: 20% - 90% non-condensing
Power Consumption	9W Max
Weight / Dimension	230g, 80mm Width x 112 mm Depth